



CYLINDERMATE STD.

P/N CM6000



The CylinderMate Standard safely stores and secures SCBA tanks in a protective enclosure. The cylinders are self-centered to protect from damage and wear in any direction. Cylinders are restrained with a lock strap.



FEATURES

- Molded from high quality materials
- High strength locking strap retains the air cylinder with a simple to use latching and removal process
- Weather, UV resistant
- Non-conductive
- Matching mounting holes allow individual Cylinder Mates to form storage units
- Pressure can be read while contained
- Empty cylinders can be safely stored and removed when installed backwards

EQUIPMENT

- **SCBA Cylinders**
Minimum Diameter = 5-3/8" (136mm)
Maximum Diameter = 7-1/8" (180mm)
Maximum Length = 23-1/8" (587mm)

SIZE & DIMENSIONS

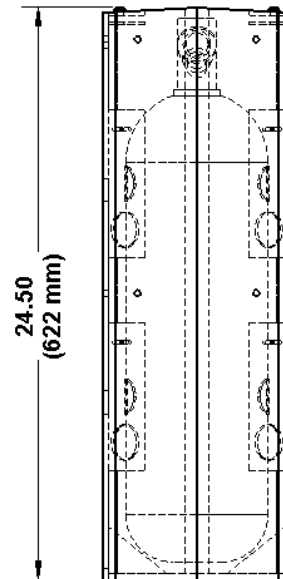

PROPERTIES

P/N	WT.	MAX. DYNAMIC LOAD	MAX. STATIC LOADS	GRIP RANGE	TEMP RANGE	FLAME RESISTANCE	PAINTABLE		
CM6000	9.5lbs 4.3kg	Cylinder wt. @ 10G'S	Cylinder weight	VARIABLE	-20 to 52 °C -4 to 125 °F	GOOD	YES		


Performance Advantage Company

Lancaster, New York

www.pactoolmounts.com

888-514-0083

REFERENCE	QTY	REMARKS	PROJECT
			LOCATION
			BUYER
			DEALER
			BUILDER
			SUBMITTED BY:
			DATE:

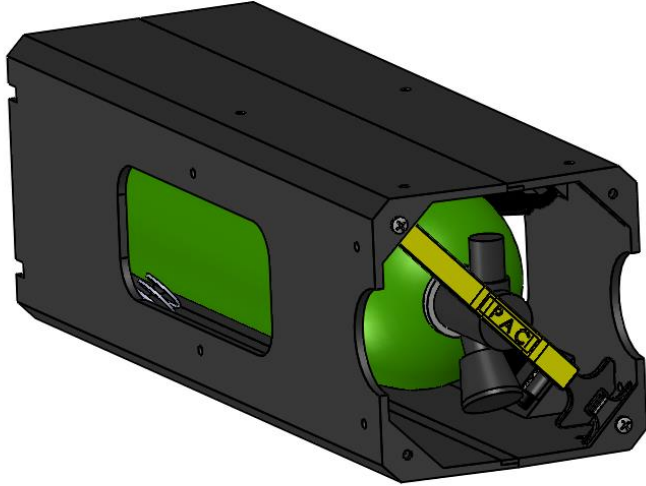

TYPICAL SPECIFICATION

Mounting bracket shall be PAC PN CM6000. Bracket shall be made from tough, corrosion free material. Hardware shall be stainless steel.

Specification to be made based on physical size of air cylinder. (diameter and length)

Users shall be protected from conductivity.

The CYLINDERMATE STANDARD provides a secure storage solution for various sized/capacity SCBA cylinders.

- Molded from high quality materials
- Easy to operate locking strap
- Weather, UV resistant
- Non-conductive
- Can be ganged together to form rolling storage carts.
- Cylinders can be stored with valve in or out safely.

