




AUTO CHARGE 20 LPC

LOW PROFILE CHARGER

Features


- 20 Amps for charging vehicle batteries
- Light weight, small low profile size
- Clean output poses no interference with radios and other mobile devices
- Auxiliary 15 Amp output circuit with power source selector switch for operating accessory loads: air compressor pumps, hand lights or handheld radios
- Front panel connections for remote display and auxiliary loads
- Designed for rigors of emergency vehicle use; heavy duty aluminum case

Remote Display Options

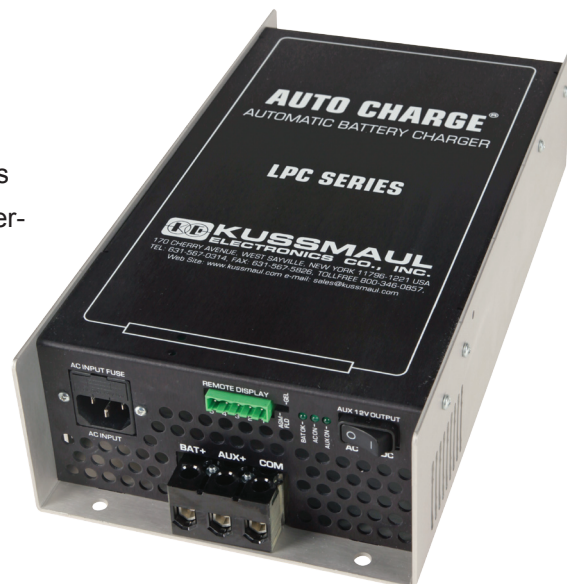

Specifications:

Input Voltage (Volts AC): 120
Input Current (Amp AC): 3.5
Input Frequency (Hz): 50/60 Hz
Output Voltage (Volts DC): 12
Output Current (Amps DC): 20
Output Fuse (Recommended): 30 Amps
Weight (lbs.): 6
Warranty: 3 Years

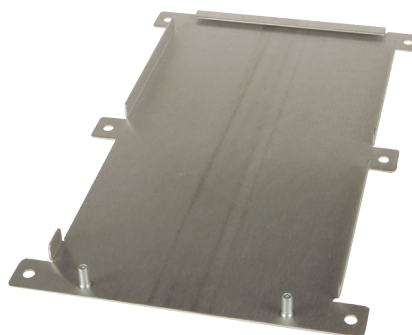

Optional Accessory

E-Z Slide Mount Plate: 091-200-EZM

For slide-in installation and removal of the LPC 20 charger in hard to access areas and spaces with minimal vertical clearance

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	H	W	D	
091-207-12-IND	LPC 20, w/ Bar Graph Display	12	20	120	3.5	3.30"	6.80"	13.25"	6
091-207-12-194B	LPC 20, w/ Status Center	12	20	120	3.5	3.30"	6.80"	13.25"	6
091-207-12-194B-WT-XX	LPC 20, w/ Watertight Display	12	20	120	3.5	3.30"	6.80"	13.25"	6
091-200-EZM	E-Z Slide Mount Plate	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A