

AUTO CHARGE LPC 45


LOW PROFILE CHARGER

Features


- 24Vdc, 45 Amps for charging vehicle batteries
- Light weight, small low profile size
- Clean output poses no interference with radios and other mobile devices
- Auxiliary 24Vdc, 15 Amp output circuit with power source selector switch for operating accessory loads: air compressor pumps, hand lights or handheld radios
- Front panel connections for remote display and auxiliary loads
- Designed for rigors of emergency vehicle use; heavy duty aluminum case
- Remote battery sensing output to compensate for longer charging cables




Remote Display Options



Bar Graph Display
091-200-IND

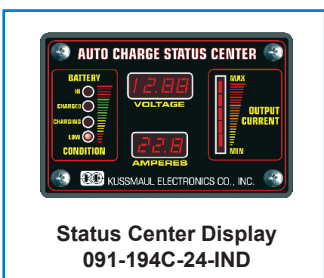


Status Center Display
091-194C-24-IND

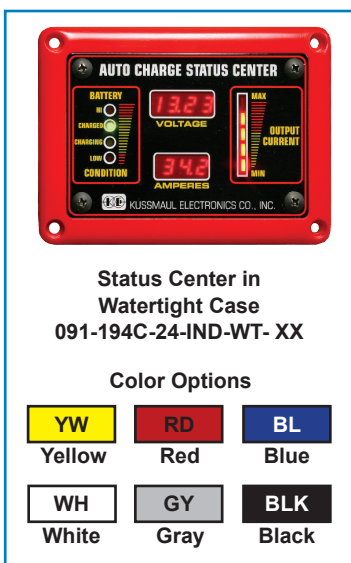

Status Center in
Watertight Case
091-194C-24-IND-WT-XX

Color Options

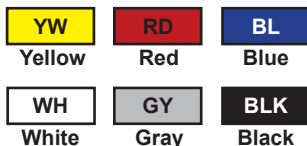

Specifications:

Input Voltage (Volts AC): 120
 Input Current (Amp AC): 13
 Input Frequency (Hz): 50/60 Hz
 Output Voltage (Volts DC): 24
 Output Current (Amps DC): 45
 Output Fuse (Included): 50 Amps
 Weight (lbs.): 10
 Warranty: 3 Years

Part Number	Description	Electrical Data				Dimensions			Wt.
		DC Volts	DC Amps	AC Volts	AC Amps	L	W	D	
091-206-24	LPC 45, w/ Bar Graph Display	12	45	120	13	13.75"	7.00"	4.09"	10
091-206-24-194C	LPC 45, w/ Status Center	12	45	120	13	13.75"	7.00"	4.09"	10
091-206-24-194C-WT-XX	LPC 45, w/ Watertight Display	12	45	120	13	13.75"	7.00"	4.09"	10