

AUTO CHARGE® LPC 40 with PLC

Low Profile Charger with Parasitic Load Compensation

Features


- Parasitic Load Compensation (PLC) allows for user input of total accessory load amps on the vehicle. This allows the charger to shift the absorption stage set point so the battery voltage drops to the float voltage when desired current is reached
- Output voltage regulated
- Remote battery charge/condition indicator display
- Accommodates Lead-Acid, Gelled Electrolyte, AGM and Odyssey® battery types
- Configurable for 3-Step or Float Charging
- Selectable 1, 5 or 10 hour Safety Timer while in 3-Step mode
- Adjustable Parasitic Load Compensation (5-35 amperes)
- Power "ON" LED indicator
- System Status indicator
- Internal cooling fan
- Patent Pending



Specifications:

Input Power: 120 Volts AC, 50/60 Hz, 5 Amps
Input Fuse: 8A, Fast Blow
Output Power (Bat): 12 Volts DC. 40 amps max.
Length: 3.3"
Width: 6.8"
Height: 13.25"
Weight: 7 lbs
Warranty: 3 years

Remote Display Options:
Standard Indicator 091-200-IND
Deluxe Indicator 091-194-IND-XX

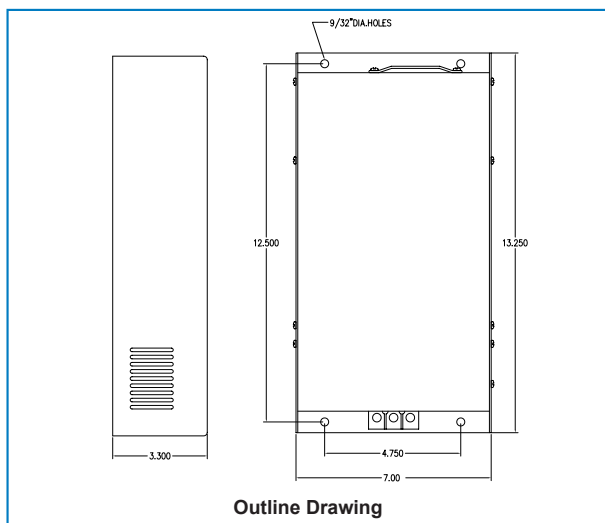

Part Number	Description	Electrical Data		Dimensions			Wgt.
		AC Volts	AC Amps	L	W	D	
091-200-12	Auto Charge 40 LPC	120	5	3.3"	6.8"	13.25"	7 lbs